



**Alemilube**

ON THE

# UP & UP

1 November - 31 December 2017



BRP5216

\$340.00

### SAFETY BARRIER REEL

- Provides a temporary barrier to clearly identify dangerous areas
- Supplied complete with 16m of durable red/white band with hook & eye
- Automatic spring rewind mechanism
- A must for addressing workplace and employee safety



ECRP24025

\$504.00

### 240V ELECTRIC CABLE REEL

- Automatic spring rewind mechanism
- The ideal and safest way to store electric cable
- Supplied with 25m x 3 x 1.5mm 2 wires, 9amp cable & plugs
- Thermal overload protection

WHILE STOCK LASTS  
**FOC**  
10350CF  
1420mL  
Clean Funnel



SA400N

\$286.00

### AIR HOSE REEL

- Impact resistant UV stabilised covers
- Automatic and positive latching mechanism
- Working pressure of 300psi (20bar)
- 1/2" BSPT (f) inlet & outlet
- Includes 15m x 12mm ID hybrid polymer hose



8828N2

\$46.20

### 20L GEAR & ENGINE OIL DRUM PUMP

- Capable of delivering up to 110mL on the downstroke
- Downtube extension and extra Reike adaptor make the pump suitable for use with a variety of 20L drums
- Working pressure of 300psi (20bar)
- Incorporates a filter in the drain back holster to protect against foreign particle contamination



424170

\$1,024.00

### 20KG GREASE KIT

- Delivery rates of up to 0.9 kg/min
- 55:1 ratio air motor develops grease pressures of up to 7,950psi (548bar)
- Will handle high density, tacky greases up to NLG12
- Heavy duty 3 jaw coupler



660AN

\$114.00

### TRIGGER ACTION GREASE GUN

- Grease pressures of up to 8,500psi (586bar)
- Delivers up to 1.1g of grease per stroke
- High volume/ high pressure option
- 4 jaw coupler and flexible 30cm long extension
- Manufactured in Germany

4  
YEAR  
WARRANTY



# GREASING



**660ANP** With Carry Case  
**TRIGGER ACTION GREASE GUN**

- Contaminant free protection for your 660AN grease gun & greasing accessories
- Convenient & handy storage for an extra grease cartridge
- Grease pressures of up to 8,500psi (586bar)
- High volume or high pressure option facilitates fast and efficient greasing



**600ACB** Clear Barrel  
**LEVER ACTION GREASE GUN**

- 100% visual identification of grease
- Develops grease pressures up to 12,000psi (828bar)
- Handles up to NLGI2 grease
- Ideal for the Food and Beverage industries where compliance and non contamination is crucial



**G10090** EL Series  
**GREASE NIPPLE ASSORTMENT KIT**

- Includes 90 grease nipples and 10 grease nipple dust covers
- Manufactured in Germany in accordance with the DIN 71412 standard in steel, case hardened, zinc plated and passivated the grease nipples as supplied with the kit are as used and specified



**680AN**  
**AIR OPERATED GREASE GUN**

- Develops grease pressures of up to 3,290psi (226bar)
- Pressure ratio of 40:1
- Suits 450g cartridge or bulk grease
- Flexible extension length of 50cm
- Manufactured in Germany



**600A**  
**LEVER ACTION GREASE GUN**

- Develops grease pressures of up to 12,000psi (828bar)
- Delivers up to 1.6g of grease per stroke
- Ever-Flow System enables the gun to be used with thick tacky greases even in the coldest conditions
- Manufactured in Germany



**Alemlube**  
**GREASE NIPPLE ASSORTMENT KITS**

- Your most popular grease nipples in a convenient compartmentalised refillable carry kit

- L4674 120 Agricultural grease nipple assortment kit **\$87.20**
- L4675 101 Industrial grease nipple assortment kit **\$84.70**
- L4676 100 Metric grease nipple assortment kit **\$76.40**



**A14512**  
**QUICK RELEASE GREASE GUN COUPLER**

- Works with all grease gun types
- 1/8" BSPT(f) and 90mm in length
- Lock-on and free up both hands to operate your grease gun
- Easy disconnection regardless of hydraulic build up
- Also available 14511, suitable for NPT specification grease nipples



**G10030** EL Series  
**AIR OPERATED GREASE GUN**

- Develops grease pressures of up to 6,000psi (414bar)
- Three way loading
- Exclusive air piston design ensures consistent priming
- Includes a 300mm long grease gun flex and four jaw coupler



**9911H**  
**ALEMLUBE 20KG GREASE KIT**

- Single shot or continuous flow hand piece
- 50:1 ratio grease pump develops grease pressures of up to 7,500psi (517bar)
- Spool valve air motor design requires minimum maintenance and results in fewer pump failures
- Quiet operation cuts noise levels by up to 30%



**428262**  
**180KG AIR OPERATED GREASE KIT**

- 55:1 ratio grease pump develops up to 7,950psi
- Complete with integral filter eliminates the chance of pump tube contamination
- Lightweight ergonomic & user friendly cast alloy grease control valve included
- 180kg drum not included



**A14510**  
**QUICK RELEASE GREASE GUN COUPLER**

- Maximum working pressure of 10,000psi (690bar)
- 135mm in length
- No need to hold while greasing
- Eliminates hydraulic lockout
- 4 hardened spring steel jaws resilient under high pressure



**G10040N** EL Series  
**18V LI-ION CORDLESS GREASE GUN**

- Generates grease pressures of up to 10,000psi (690bar)
- Capable of delivering up to 80 g/min
- 25 minutes continuous working time
- Spare battery, recharger, 106cm long grease gun flex and plastic moulded carry case supplied standard



**KPL-24EX**  
**24V 20KG GREASE KIT**

- Working pressure of 4,000psi (276bar)
- Suitable for grease up to NLGI2
- Can dispense up to 70-80 g/min
- Continuous operation
- Can be used with a hose reel with up to 15m of hose



**223003**  
**180KG MOBILE GREASE KIT**

- Hose reel c/w 10m x 6mm ID delivery hose
- Grease pump with delivery rates of up to 540 g/min
- Maximum grease pressure of 7,700psi (550bar)
- Provides a cost effective & versatile solution



**Alemlube**  
**GREASE GUN FLEXES**

- Minimum burst pressure of 14,500psi (1,000bar)
- Polyamide hose maximises product life
- A14551 30cm long **\$16.50**
- A14552 45cm long **\$17.10**
- A14553 70cm long **\$25.70**



**670AN4**  
**20V LI-ION CORDLESS GREASE GUN**

- Up to 15 cartridges per battery charge
- Delivery rates of up to 170 g/min
- Grease pressure of up to 10,000psi (690bar)
- LCD with real time battery capacity, grease level and grease metering information



**424150**  
**20KG GREASE KIT WITH TROLLEY**

- Delivery rates of up to 0.9 kg/min
- 55:1 ratio air motor develops grease pressures of up to 7,950psi (548bar)
- Will handle high density, tacky greases up to NLGI2
- Heavy duty 3 jaw coupler



**C9979** Alemlube  
**180KG AIR OPERATED GREASE PUMP**

- 50:1 ratio double acting grease pump capable of delivery rates of up to 2 kg/min
- Spool valve operation reduces maintenance costs
- An unconditional two year warranty applies
- Includes pump, cover and 3m air hose



**14507**  
**PUSH ON BUTTON HEAD COUPLER**

- Die cast coupler body with swivel conveniently slides over standard button head grease nipples and ensures reliable and dependable lubrication of heavy machinery and contractor's equipment



# OIL TRANSFER



454600N **\$2,960.00**

### OIL PUMP, REEL AND METER KIT

- Includes a 3:1 ratio drum pump, 10m hose reel, electronic meter and a 2m pump to hose reel connection hose
- Adjustable flow rates of up to 10 L/min
- 3:1 ratio pump suits 205L drums



304600 **\$101.50**

### OIL TRANSFER DRUM PUMP

- Suitable for the transfer of light to medium viscosity lubricants
- Delivers approximately 0.45L per stroke
- Telescopic down tube makes the pump suitable for 60L and 205L drums
- Includes a delivery hose and outlet spout facilitating quick, easy and contaminant free lubricant transfer



8828N2 **\$46.20**

### 20L GEAR & ENGINE OIL DRUM PUMP

- Capable of delivering up to 110mL on the downstroke
- Downtube extension and extra Reike adaptor make the pump suitable for use with a variety of 20L drums available on the market
- Ideal pump for the transfer of engine, gear, diff and hydraulic oils in busy vehicle servicing workshops



228701 **\$2,754.00**

### 205L MOBILE OIL TRANSFER KIT

- Transfer kit flow rates of up to 35 L/min
- 10m x 12mm ID delivery hose
- Maximum fluid outlet pressure of 420psi (30bar)
- Samoa oil meter with flexible nozzle



99 SERIES **\$000.00**

### SPRING OPERATED DRUM PUMPS

- Ideal for the topping up of engines, gear boxes, transmissions and differentials
- 9978 Lubricant drum pump with hose **\$163.10**
- 9976 ATF drum pump with hose and filter **\$171.40**
- 9928 Lubricant drum pump with hose **\$172.30**
- 9926 ATF drum pump with hose and filter **\$186.20**



10028 Heavy Duty **\$126.70**

### 20L GEAR OIL DRUM PUMP

- Heavy duty fully serviceable drum pump delivers 170mL on the downstroke
- Non-drip nozzle and drain back holster ensure a clean, safe workshop
- Ideal for use with engine, hydraulic, gear, diff & synthetic oils
- Also suitable for underground coal mine use



363114 **\$258.30**

### OIL CONTROL VALVE

- Flow rates of up to 40L/min
- Maximum working pressure of 1,450psi (100bar)
- 1/2" BSPT(f) inlet port & swivel
- Trigger lock helps to prevent accidental dispensing



454111N **\$995.00**

### OIL TRANSFER KIT WITH ON/OFF GUN

- Includes a high quality 3:1 ratio pump, 3m x 1/2" ID hydraulic hose and on / off control valve
- Transfer rates of up to 15 L/min
- Suits 60L and 205L drums



001014-PU iCan 5L **\$163.20**

### CONTAINER PUMP KIT

- Sturdy hand pump for fast dispensing
- Colour code labelling system for easy lubricant identification
- iPouch holds and stores important documents on container
- Quick and safe fill port



80100 **\$120.40**

### 205L DRUM DOLLY

- Includes 4 x 75mm heavy duty casters
- Provides a convenient and easy means of moving 205L drums around a workshop, warehouse or production facility
- Industrial quality steel construction
- Reduces the physical effort of drum handling and provides a safer working environment



365534 **\$902.00**

### ELECTRONIC OIL METER

- Electronically meters and totalises the amount of lubricant dispensed
- Maximum flow rate of 30 L/min
- Fluid inlet is a 1/2" BSPT(f) swivel
- Maximum operating pressure of 1,450psi (100bar)



454110N **\$1,569.00**

### OIL TRANSFER KIT WITH METER

- 3:1 ratio pump, 3m x 1/2" ID hydraulic hose & electronic resettable meter
- Flow rates of up to 12 L/min
- Maximum fluid outlet pressure of 420psi
- Air pressure range from 20psi to 140psi



001014-12 iCan 5L **\$92.20**

### CONTAINER WITH 12MM POUR LID KIT

- Fully sealed system reduces the chance of lubricant contamination
- Dual scale (metric/quarts) gauge for accurate guide during dispensing
- Large flat surface ideal for iPouch labelling
- Colour code labelling system for easy lubricant identification



80205 **\$171.70**

### 205L DRUM RACK

- Designed for the convenient moving, safe storage and decanting of 205L drums
- Ideal for workshops, warehouses & production facilities
- Sturdy construction with a maximum carrying capacity of 317kg



365300 **\$1,153.00**

### ELECTRONIC PRESET OIL METER

- Automatically cuts off when the preset amount of lubricant is dispensed
- Max. flow rate of 30 L/min. Min. flow rate of 1 L/min
- 1/2" BSPT(f) swivel supplied standard
- Accurate to ±0.5%



378110N **\$5,689.00**

### 205L MOBILE OIL TRANSFER KIT

- Supplied with 3:1 air operated oil pump, 8m hose reel, electronic meter and heavy duty drum trolley
- Adjustable flow rates up to 10 L/min
- 3:1 ratio oil pump suits 205L drums
- Electronic oil meter maximum pressure of 1,000psi (69bar)



656110 1000L **\$4,488.00**

### IBC STORAGE AND DISPENSING KIT

- Suitable for the storage and dispensing of oil
- Includes a 3:1 ratio pump, 3m of R1 delivery hose and an electronic oil meter
- Flow rates of up to 12 L/min
- Dimensions of 1280mm (L) x 770mm (W) x 1420mm (H)
- 757110 2000L tank with dispensing kit **P.O.A**



454697C **\$4,469.00**

### IBC OIL STORAGE AND TRANSFER KIT

- Unit includes a 1,000L IBC container, 3:1 ratio pump, hose reel inclusive of 10m of hose, a side mounting bracket and an electronic oil meter
- Environmentally friendly as costly and time consuming empty 205L drum disposal is no longer required
- 3:1 ratio pump facilitates flow rates of up to 18 L/min



454100N **\$1,153.00**

### OIL MEASURE FILLER

- Heavy duty air operated lube pump ensures a long service life
- Spring loaded tap and plastic moulded drip tray
- Ideal for the filling of oil bottles and oil measures in small to medium sized workshops



# AUTOMOTIVE WORKSHOP



## ALE SERIES

### DIAPHRAGM PUMPS

The extensive range of Yamada ALE Series diaphragm pumps from Alemlube will provide you with a reliable and cost effective means of transferring fluids whilst minimising downtime. Capable of flow rates from 10L/min to 540L/min (subject to model), these pumps are engineered and manufactured in Japan and are suitable for transferring fluids such as diesel fuel, a range of oils, brake fluid, antifreeze, waste water and many chemicals (subject to model). The Rugged bolted construction eliminates leaks and simplifies maintenance procedures.



Model	Description	Construction Materials Wetted / Elastomers	Connection Inlet / Outlet	Maximum Flow L/min	Price
ALE-50BAH	Air Operated Waste Oil Diaphragm Pump	Aluminium / Hytrel®	2"	630	\$3,734.00
ALE-50BST	Air Operated Diaphragm Pump	Stainless Steel / Teflon	2"	600	\$8,290.00
ALE-40BAH	Air Operated Waste Oil Diaphragm Pump	Aluminium / Hytrel®	1 1/2"	350	\$3,129.00
ALE-40BAT	Air Operated Diaphragm Pump	Aluminium / PTFE	1 1/2"	400	\$3,539.00
ALE-25BAH	Air Operated Diaphragm Pump	Aluminium / Hytrel®	1"	160	\$2,039.00
ALE-20BAH	Air Operated Diaphragm Pump	Aluminium / Hytrel®	3/4"	100	\$1,358.00
ALE-20BAT	Air Operated Aluminium Diaphragm Pump	Aluminium / PTFE	3/4"	100	\$1,968.00
ALE-20BST	Air Operated Stainless Steel Diaphragm Pump	Stainless Steel / Teflon	3/4"	100	\$2,972.00
ALE-15FPH	Air Operated Waste Oil Diaphragm Pump	Polypropylene / Hytrel®	1/2"	45	\$1,141.00
ALE-15FVT	Air Operated Waste Oil Diaphragm Pump	Viton / Teflon	1/2"	45	\$2,647.00



42068N

\$534.00

### TRUCK & BUS WASTE OIL DRAINER

- Holding tank capacity of 68L
- 860mm handle length
- Two baffles in the holding tank reduce the possibility of waste oil spillage
- Dimensions of 1,220mm x 790mm x 190mm



41006N

\$205.60

### MANUAL WASTE OIL EXTRACTOR

- 6.5L capacity
- Portable, lightweight and self-contained
- Extracts waste oil from motor vehicles, motor bikes, lawn mowers, marine engines, stationary engines and all-terrain vehicles
- Also suitable for salt water (bilge) and water applications



30080

\$602.00

### WASTE OIL DRAINER

- Transfers and captures waste oil from crankcases, transmissions and differentials
- Catchment bowl capacity of 20L
- Holding tank capacity of 80L
- Equipped with a pneumatic safety relief valve calibrated at 14psi (1bar)



372400

\$1,052.00

### SAMOA WASTE OIL DRAINER

- Premium quality and European engineering
- Drain bowl capacity of 20L
- Holding tank capacity of 100L
- Maximum working height of 2,000mm
- Minimum working height of 1,400mm



372200

\$1,894.00

### SAMOA WASTE OIL DRAINER/EXTRACTOR

- Drain bowl capacity of 20L
- Holding tank capacity of 100L
- Clear viewing inspection bowl capacity of 8L
- Maximum working height of 2,000mm
- Minimum working height of 1,600mm



30101

\$1,241.00

### SAMOA WASTE OIL DRAINER/EXTRACTOR

- Holding tank capacity of 80L
- Height adjustable waste oil reservoir
- Holding tank emptied with the aid of air pressure
- Suction speed rate of 6.5 L/min



GMRF10010 Worky GMR Series

\$6,674.00

### CAR EXHAUST REELS

- 10m x 100mm hose diameter
- Reduce vehicle emissions & improve air quality
- Spring, push button or cordless remote rewind option available
- Equipped with an internal fan
- Various models available for motorbikes and cars
- Fixed, or with the aid of channel rails, mobile operation is possible

GMR10010 Also available without fan \$4,951.00



GMRF15012.5 Worky GMR Series

\$9,782.00

### COMMERCIAL VEHICLE EXHAUST REELS

- 12.5m x 150mm hose diameter
- Reduce vehicle emissions & improve air quality
- Spring, push button or cordless remote rewind option available
- Equipped with an internal fan
- Various models available for buses and trucks
- Fixed, or with the aid of channel rails, mobile operation is possible

GMR15012.5 Also available without fan \$7,346.00



WORKY GSR SERIES

\$POA

### SLIDING RAIL FUME EXTRACTOR SYSTEM

- Ideal system for larger workshops with multiple service bays
- Consists of the following components:
  - Aluminium alloy sliding rail, 125mm wide
  - Movable trolley
  - Suction hose, 4m x 76mm ID TPE elastic material
  - Rubber suction nozzle
  - Low noise aluminium alloy fan



# USER FRIENDLY

## S SERIES

### HOSE REELS

The S Series extensive range of hose reels will provide you with a reliable and cost effective means of storing and retrieving hose assemblies in your workshop.

Features include:

- PVC hose
- Impact resistant UV stabilised covers for maximum durability
- Automatic and positive latching mechanism
- Can be wall, ceiling or floor mounted
- Adjustable spring tension
- High flow swivel and fluid path
- Detachable steel mounting bracket enables 180° hose reel rotation

## LOCKABLE DIESEL REFUELLING

### STORAGE AND DISPENSING KITS

- Heavy duty, robustly constructed polyethylene tank
- Built in nozzle holster
- Lockable lid aids diesel fuel security and protects dispensing kit components
- Unique user friendly design with lockable lid to aid fuel and dispensing kit security
- Dispensing kit consists of a 12V pump, antistatic fuel delivery hose, 2 metre battery cables and auto nozzle
- Forklift lift points and tie down capability
- Tank baffles aid vehicle stability
- Suits all makes of single and twin cab utes



Product No.	Capacity	Flow Rate	w/Meter	Price
L10040PA	100L	50 L/min	—	\$1,080.00
L10040PAM	100L	50 L/min	Yes	\$1,266.00
L20040PA	200L	50 L/min	—	\$1,158.00
L20040PAM	200L	50 L/min	Yes	\$1,343.00
L45040PA	450L	50 L/min	—	\$1,583.00
L45040PAM	450L	50 L/min	Yes	\$1,771.00
L60040PA	600L	50 L/min	—	\$1,725.00
L60040PAM	600L	50 L/min	Yes	\$1,910.00

## DIESEL REFUELLING

### STORAGE AND DISPENSING KITS

- Dispensing kit consists of a 12V pump, 4m antistatic fuel delivery hose 2m battery cables and automatic nozzle
- Patented self priming rotary vane pump manufactured in Italy is capable of delivery rates of up to 68 L/min
- Polyethylene tank cannot dent, scratch or corrode
- Tank baffles aid vehicle stability
- Pallet lift points and recesses for tie down straps on the tank aids handling & installation

Product no.	Capacity	Flow Rate	w/Meter	Price
L40049GA	400L	49 L/min	—	\$1,965.00
60068PA	600L	68 L/min	—	\$2,148.00



Product No:	Product Description	Hose Length	Hose ID	Working Pressure	Hose material	Cover Colour	Hose Colour	Max. Working Temp.	Reel inlet BSPT(m)	Hose Outlet BSPT(m)	Price inc gst
SA300N	Air Hose Reel	18M	10mm	300 Psi (20Bar)	Hybrid Polymer	Red	Yellow	-10°C~60°C	3/8"	3/8"	\$262.30
SA400N	Air Hose Reel	15M	12mm	300 Psi (20Bar)	Hybrid Polymer	Red	Yellow	-10°C~60°C	1/2"	1/2"	\$286.00
SAW100	Air And Water Hose Reel	16M	10mm	300 Psi (20Bar)	PVC	Red	Blue	0°C~60°C	3/8"	3/8"	\$219.90
SAW200	Air And Water Hose Reel	13M	12mm	300 Psi (20Bar)	PVC	Red	Blue	0°C~60°C	3/4"	3/4"	\$230.50
SW500N	Water Hose Reel	18M	12mm	180 Psi (12Bar)	Polyurethane	Blue	Red	-20°C~60°C	1/2"	1/2"	\$297.20
SGRW510	Garden Water Hose Reel	16M	12mm	145 Psi (10Bar)	PVC	Green	Green	0°C~60°C	3/4"	Nozzle	\$232.80
SHW520	Hot Water Hose Reel	12M	10mm	300 Psi (20Bar)	EDPM Rubber	Blue	Red	-20°C~90°C	3/8"	3/8"	\$383.00
SO600	Oxy-Acetylene Hose Reel	15M	6mm	300 Psi (20Bar)	Rubber	Blue	Red/Blue	-30°C~60°C	5/8"	5/8"	\$473.00
SO1700	Oil Hose Reel	10M	12mm	2,000 Psi (138Bar)	S.A.E. 100R1 Rubber	Black	Black	-30°C~100°C	1/2"	1/2"	\$421.00
SG800	Grease Hose Reel	10M	6mm	5,000 Psi (345Bar)	S.A.E. 100R2 Rubber	Black	Black	-30°C~100°C	1/4"	1/4"	\$333.00



## EL SERIES

### HOSE REELS

- Increase safety by reducing rewind speed by up to 80%
- High quality impact and UV resistant polypropylene covers
- Temperature range from -40°C to +60°C


Product No:	Product Description	Hose Length	Hose ID	Working Pressure	In/outlet BSPT(m)	Price
HR40030	Air Hose Reel	20M	10mm	300psi (20bar)	3/8"	\$174.60
HR40040	Air Hose Reel	15M	12mm	300psi (20bar)	3/8"	\$181.60
HR40050	Water Hose Reel	20M	12mm	140psi (20bar)	3/4"	\$178.60
HR30070	Hot Water Hose Reel	20M	10mm	300psi (20bar)	3/8"	\$220.40
HR30070C	Hot Water Hose Reel with Nozzle	20M	10mm	300psi (20bar)	3/8"	\$347.00
HR30080	Hot Water Hose Reel	15M	12mm	300psi (20bar)	1/2"	\$238.10
HR30080C	Hot Water Hose Reel with Nozzle	15M	12mm	300psi (20bar)	1/2"	\$365.00



SJ-100-006

### 2 & 4 DRUM SPILL CONTAINERS


- Holds up to 4 x 205L drums
- 100% recyclable polyethylene construction
- Non-skid removable platform
- Compatible with most forklifts and pallet trucks



SJ-200-010

### 2 DRUM RACK & SPILL CONTAINERS

- Securely stacks up to 2 x 205L drums
- Compatible with most forklifts and pallet trucks
- Helps to create an OH&S compliant workplace environment

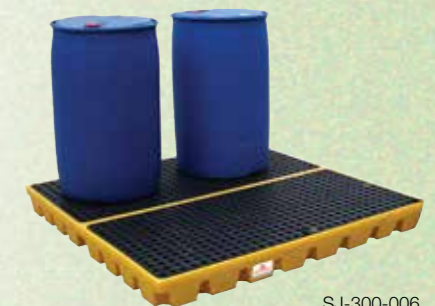

SJ-300-006

### 4 DRUM FLOOR & SPILL CONTAINERS

- Slip resistant texture on workfloor deck and ramp
- Excellent chemical compatibility
- Image also shows SJ-300-010 Workfloor Ramp

## SINGLE & DOUBLE

### IBC SPILL CONTAINERS

- 100% recyclable polyethylene construction
- Non-skid removable platform
- Compatible with most forklifts and pallet trucks
- Stackable for ease of storage & lower transportation cost



SJ-510-001

Product	Capacity	Dimensions	Price
SJ-100-002	236L	750mm (L) x 1300mm (W) x 440mm (H)	\$691.00
SJ-100-006	242L	1290mm (L) x 1380mm (W) x 280mm (H)	\$809.00
SJ-200-003	450L	1350mm (L) x 11375mm (W) x 635mm (H)	\$1,015.00
SJ-200-010	450L	940mm (L) x 1375mm (W) x 390mm (H)	\$1,631.00
SJ-300-001	120L	800mm (L) x 1600mm (W) x 150mm (H)	\$733.00
SJ-300-006	240L	1600mm (L) x 1600mm (W) x 150mm (H)	\$1,018.00
SJ-300-010	-	1290mm (L) x 810mm (W) x 180mm (H)	\$320.00
SJ-400-001	250L	-	\$1,794.00
SJ-510-001	1,180L	1680mm (L) x 1680mm (W) x 700mm (H)	\$2,393.00
SJ-500-003	1,100L	2,450mm (L) x 1,450mm (W) x 575mm (H)	\$3,964.00



# FUEL TRANSFER & METERING



51037 **AUTOMATIC DIESEL NOZZLE** \$272.70

- Automatically cuts off when a diesel tank is full
- Can operate with flow rates up to 120 L/min
- Suitable for applications involving an electric diesel transfer pump
- Swivel included



51007 **1" MECHANICAL DIESEL FUEL METER** \$424.00

- Accurate between flow rates of 20 L/min to 120 L/min
- Mechanical gear meter accurate to  $\pm 1.0\%$
- Maximum working pressure of 145psi (10bar)
- 1" BSPT(f) inlet/outlet ports
- 4 digit partial display (max. 9999 litres) with 7 digit total



ALS-400/240 **FLUID LEVEL MONITORING SYSTEM** \$1,716.00

- Low cost - High performance
- Non-contact method of liquid level detection using an ultrasonic sensor
- Programmable low or high liquid level alarm for remote user notification by email
- High contrast white LED backlit LCD display of with 6 characters of 18 mm



51037M **DIESEL NOZZLE WITH METER** \$403.00

- Automatically shuts off on back pressure
- Digital meter with 5-digit current dispensed total - resettable
- Flow rates of up to 60 L/min
- 1" BSPT swivel inlet & 19mm (3/4") outlet spout



FM200 GPI **1" MECHANICAL FUEL METER** \$370.00

- Accurate between flow rates of 15 L/min and 75 L/min
- Field calibration possible
- 1" BSPT inlet/outlet
- Batch total of 999L



M150SA GPI Heavy Duty **DIESEL REFUELLING DRUM PUMP** \$865.00

- Flow rates of up to 49 L/min
- Gear type pump with a heavy duty cast aluminium body
- Dry prime of 1.7m and total lift capacity of 7.6m
- Includes 4.6m of battery cable, 3.0m of antistatic delivery hose and heavy duty auto nozzle



50056 **240V DIESEL FUEL DISPENSER** \$1,563.00

- Flow rates from 70L/min
- Accurate to  $\pm 1\%$
- Noise level below 75dB
- IP55 Protection
- Automatic nozzle with swivel connection
- AC/DC versions available



380000 **12V PETROL & AVGAS TANK PUMP** \$858.00

- Flow rates of up to 75 L/min
- 1" BSPT(f) inlet/outlet
- Duty cycle of 30 minutes on and 30 minutes off
- ATEX and IECEx certification complies with all relevant Australian Standards relating to the transfer of flammable liquids



51008 **1" MECHANICAL DIESEL FUEL METER** \$304.00

- Mechanical gear meter accurate to  $\pm 1.0\%$
- Maximum working pressure of 142psi (10bar)
- 1" BSPT(f) inlet/outlet ports
- Batch total of 999L displayed with 18mm high digits



M3425-AL GPI High Volume **DIESEL REFUELLING DRUM PUMP** \$1,337.00

- 24V motor and automatic shut off nozzle
- Fast refuelling with flow rates of up to 85 L/min
- Lightweight ergonomic & user friendly cast alloy grease control valve included



51090 **DIESEL FUEL DISPENSER KIT** \$4,172.00

- Automatic nozzle with flow rates of up to 70 L/min
- Can be interfaced with fleet management systems
- Accurate to  $\pm 0.5\%$
- Continuous AC operation with IP55 protection



52002A **12V DIESEL REFUELLING TANK KIT** \$781.00

- Flow rates of up to 46 L/min
- Motor protection fuse prevents motor overload
- Telescopic down tube enables the pump to be used in fuel tanks of up to 1,000mm deep
- Includes an auto shut off fuel nozzle



01A12LM GPI **1" INLINE ELECTRONIC FUEL METER** \$301.00

- Flow range: 10 L/min to 100 L/min
- Maximum working pressure of 300psi (21bar)
- Factory calibrated (not field calibratable)
- For use with diesel only on gravity feed or electric transfer pumps



52004A High Volume **12V DIESEL REFUELLING DRUM PUMP** \$1,269.00

- Flow rates of up to 68 L/min
- Self priming vane pump with sintered steel rotor and acetyl resin vanes
- 1" BSPT(f) inlet/outlet
- Telescopic down tube suits fuel tanks up to 1,000mm deep



51090-2.0 **WI-FI DIESEL FUEL DISPENSER KIT** \$5,227.00

- Automatic nozzle with flow rate of up to 70 L/min
- Real time monitoring of the operation of each device connected directly via WiFi/LAN
- Able to manage and operate up to 1,000 users, 1,000 vehicles and 12 number of bowser
- PW - WiFi 2.0 (software sold separately)



GTA12244560 24V/12V **DIESEL REFUELLING TANK KIT** \$1,739.00

- Flow rates of up to 70 L/min (24V), 35 L/min (12V)
- Complete with mechanical meter with 3-digit batch total accurate to  $\pm 1.0\%$
- Auto shutoff nozzle with inlet swivel
- 1" BSPF threaded inlet & outlet ports

GTP12244560 Also available with manual nozzle \$000.00



407010N2 Inline **1" ELECTRONIC DIESEL FUEL METER** \$304.00

- Accurate between flow rates of 20 to 120 L/min
- Maximum operating pressure of 290psi (20 bar)
- 5-digit partial display from 0.1 to 99999
- 1" BSP inlet and outlet ports



372010 **12V PETROL & AVGAS DRUM PUMP** \$1,135.00

- Automatic nozzle with flow rates of up to 50 L/min
- Suitable for the transfers of ULP, Avgas, E10, diesel and kerosene
- Fully-flanged components: pump, flow meter and filters easily fitted or replaced
- 4m long antistatic fuel hose



50090 High Flow **240V DIESEL FUEL BOWSER** \$2,108.00

- Flow rates of up to 90 L/min
- Complete with self priming vane pump, 4-digit mechanical meter, 4m of antistatic delivery hose, and an automatic shut off nozzle with swivel connection
- Facilitates quick, secure and safe fuel transfer for non-commercial users



# FLUID MANAGEMENT



**501A**  
**ROTARY DRUM PUMP** \$145.00

- Delivery rates of up to 18 L/min or 0.26L per rotation
- Zinc alloy impellers make the pump suitable for the transfer of diesel, petrol, kerosene, unleaded petrol and low viscosity oils
- Can syphon and transfer fuels and lubes in reverse
- 4 chamber pump body primes quickly and easily



**6603A**  
**BRAKE CLEANER SPRAYER** \$46.00

- Large filling opening
- Safety valve at 36psi (2.5bar) with depressurisation option
- Not suitable for use with acids
- Also suitable for degreaser, tyre shine, hydrocarbon based solvents, lubricants, vegetable & animal oils



**5000MFN**  
**OIL MEASURE** \$39.00

- Polyethylene oil measure will not dent, scratch or corrode
- Flexible delivery spout makes the topping up of engines, gear boxes, diffs, transmissions and crank cases a quick and easy proposition
- Screw on lid helps to prevent contaminants from entering the oil measure and ultimately vehicle engines



**5005AN2**  
**REFUELLING DRUM PUMP** \$312.00

- Rowing action drum pump capable of delivery rates of 1L per stroke or up to 40 L/min
- Adjustable spout, ABS piston and polypropylene piston seals and 2.6m antistatic hose makes the pump suitable for the transfer of diesel fuel, petrol, kerosene, unleaded petrol and low viscosity oils up to SAE30



**50000**  
**12V SUBMERSIBLE TRANSFER KIT** \$185.90

- Submersible pump for diesel, water, coolant and oils up to SAE20
  - Capable of flow rates of up to 32 L/min
  - Includes 4m of fuel delivery hose, 4m of battery cable with on / off switch & clamps and a manual nozzle
- 50001** as above but 24V **\$185.90**



**Alemlube**  
**REUSABLE HOSE ENDS**

- 7/16" JIC to Beka Max 8.3mm hose
  - Includes hose sleeve and stud
- BT0544** Zinc plated mild steel **\$17.40**  
**BT0544SS** Stainless Steel **\$42.00**  
**BT0566** Zinc plated mild steel 90 **\$36.30**



**1035OCF**  
**CLEAN FUNNEL** \$12.20

- 1,420mL capacity - high flow delivery port
- Screw down caps at both ends of the funnels ensure that they are contaminant free for the next time you need to use them
- Durable, versatile and uniquely designed



**HP100 GPI**  
**DUAL ACTION REFUELLING DRUM PUMP** \$407.00

- Flow rates of up to 189L per 100 cycles
- 1" Inlet / 3/4" outlet
- Suitable for use with diesel fuel, petrol, kerosene, light oils and hydraulic fluid
- Supplied complete with 2.5m x 19mm ID hose and built-in nozzle hanger



**52000A**  
**12V DIESEL REFUELLING TANK KIT** \$638.00

- Capable of flow rates of up to 50 L/min
  - Includes 4m of antistatic fuel delivery hose, 2m of battery cable, a stainless steel & brass fuel filter and an automatic shut-off nozzle
  - Maximum head capacity of 15m
- 52000** as above but with manual nozzle **\$433.00**



**FAZ03552-00**  
**BULKHEAD GREASE NIPPLE** \$20.90

- Provides a connection point for manual greasing
- Connects to 6mm grease tubing
- Complete with grease nipple, locking nut and 6mm compression
- For mounting on 3mm plate through 11mm clearance hole



**41009**  
**205L DRUM TOP PAN** \$56.50

- Easily fits most standard sized 205L drums
- Polyethylene construction with stainless steel strainer
- Suitable for use with oil, diesel, petrol, kerosene, water and all fluids compatible with polyethylene
- Works with most hand & air operated drum pumps



**5080AN** Hi-Speed  
**REFUELLING DRUM PUMP WITH FILTER** \$642.00

- Delivers up to 115L/min (1.15L per rotation)
- Suitable for the transfer of diesel fuel, petrol, light oils up to SAE30 and kerosene
- Supplied complete with 2.6m of fuel resistant hose, spout, in built spout holster, 10 micron fuel filter, 3-piece downtube and new heavy duty bung adaptor
- 1" BSPF threaded inlet & outlet ports



**Pulsarlube E Series**  
**SINGLE POINT GREASE LUBRICATORS**

- Highly cost effective & simple to operate
  - Easy to adjust dispensing period while in operation
  - Instant on & off
  - Easy to install without the use of tools
- E120/PL1** 120cc filled with PL1 grease **\$70.20**  
**E240/PL1** 240cc filled with PL1 grease **\$77.80**



**Alemlube**  
**HEADER BLOCKS**

- Group lube points together & assist in the lubrication of hard to reach lube points and bearings
  - Supplied inclusive of 45° angled grease nipples and 6mm tube compression fittings
- 6136** 6 point header block **\$102.60**  
**6135** 5 point header block **\$96.70**  
**6134** 4 point header block **\$89.00**  
**6133** 3 point header block **\$74.40**  
**6132** 2 point header block **\$71.50**



**41008**  
**DRUM FUNNEL WITH COVER** \$43.10

- Easily screws into all standard 60L and 205L drums
- Large 8L capacity
- Removable lid with attached safety cable
- Heavy duty internal breather pipe
- Built in strainer



**401A** 60- 205L Drums  
**RYTON ROTARY DRUM PUMP** \$272.70

- Flow rates of up to 20 L/min
- Ryton and stainless steel construction provides excellent chemical compatibility
- Unique, rotating 2 piece discharge spout assists fluid transfer
- Suitable for the transfer of low viscosity chemicals, lacquers, AdBlue® and mild acids



**Pulsarlube M Series**  
**MULTI POINT GREASE LUBRICATORS**

- Pumps grease up to 60bar
  - Not affected by temperature or bearing back pressure
  - Can be mounted up to 6m away from the bearing & can supply up to 8 greasing points via progressive divider block
- M250/PL1** 250cc filled with PL1 grease **\$383.00**  
**M500/PL1** 500cc filled with PL1 grease **\$473.00**



**Alemlube**  
**GREASE HOSE**

- 10m x 8.3mm diameter 280bar tubing
  - Use in conjunction with a range of reusable hose studs & tube sleeves
- 100120200-10** 10m of grease filled hose **\$112.90**  
**100120201-10** 10m of empty hose **\$99.20**



**7701A** 1L Capacity  
**MULTI PURPOSE TOP UP KIT** \$22.80

- Suitable for all oils, automatic transmission fluids, brake fluids and some hand cleaners
- Not suitable for combustible fluids
- Self-contained unit prevents oil contamination when not in use



# HOSE REELS & METERING



506222 **\$827.00**

### SAMOA SINGLE ARM OIL HOSE REEL

- Lightweight, one-piece composite barrel assembly
- Supplied with 15m x 12mm ID hose
- 3 position adjustable outlet arm facilitates ceiling or floor mounting
- 0.8m long inlet hose included as standard
- Lightweight at just 12.6kg



508225 Samoa **\$2,888.00**

### SAMOA HIGH VOLUME HOSE REEL

- Long-life heavy duty double arm design
- Supplied with 15m x 1" BSPT(f) ID hose
- 1,250psi (86bar) hose pressure rating
- Suitable for use with fuel, oil, air, water and waste oil
- Ideal for high volume applications



OM050A001-241R4 Flomec **\$3,664.00**

### 2" THREADED ELECTRONIC METER

- Flow rates from 30 to 500L/min
- Max operating pressure: 285psi (20bar)
- Max. operating temperature 80°C
- Available in AL, SS & body
- Other sizes available from 1/8" to 4"



504150 **\$1,237.00**

### SAMOA HEAVY DUTY HOSE REEL

- Maximum working pressure of 290psi (20bar)
- 1/2" BSPT(m) inlet/outlet
- Supplied complete with 15m x 1/2" ID hose and 0.8m inlet hose
- Full 1/2" ID port, shaft and swivel
- Heavy duty double pedestal construction



HR90005BSS EL Series **\$2,880.00**

### S/STEEL SPRING REWIND HOSE REEL

- Bare reel can store and retrieve up to 30m x 25mm ID hose
- Reinforced Stainless Steel frame provides maximum strength & stability
- Ideal for corrosive marine, dairy and food & beverage applications
- Viton seals and AISI304 S/Steel swivel included standard



AWS812 **\$576.00**

### AIR HOSE REEL

- Features moulded steel and electrostatically painted covers, reinforced polyurethane hose and 4 way roller guide assembly
- Includes 12m x 8mm ID delivery hose and short lead in hose
- Ideal for industrial or production line applications



HR90045BSS EL Series **\$1,939.00**

### S/STEEL SPRING REWIND HOSE REEL

- Bare reel can store and retrieve up to 25m x 12mm ID hose
- Reinforced Stainless Steel frame provides maximum strength & stability
- Ideal for corrosive marine, dairy and food & beverage applications
- Viton seals and AISI304 S/Steel swivel included standard



8078-C **\$1,763.00**

### ALEMITE HEAVY DUTY HOSE REEL

- Includes 10m x 12mm ID grease hose and hose stop
- Maximum working pressure rate of 1,500psi (103bar)
- Anti lock ratchet
- Sealed and plated bearings
- Power spring cassette
- Metal arbor



SHWT-N-1100 Spring Rewind **\$3,082.00**

### SPRING REWIND OXY-ACETYLENE HOSE REEL

- Auto rewind easily wraps, store and protects hose
- Stores & retrieves 30m x 1/4" ID hose
- Working pressures of up to 200psi (14bar)
- Heavy Gauge steel base & support post
- Durable proprietary CPC powder coated



OM025P001-811 Flomec **\$1,012.00**

### 1/2" THREADED ELECTRONIC METER

- Flow rates from 1.8 to 18L/min
- Max operating pressure: 3,625psi (250bar)
- Max. operating temperature 120°C
- Other sizes available from 1/2" to 4"
- Available in SS body



AP1009 **\$114.70**

### COMPACT AIR HOSE REEL

- Compact plastic covered hose reel is ideal for smaller type workshops or where work space is at a premium
- Complete with wall/ceiling mounting bracket and 1m of lead in hose
- Maximum operating pressure of 300psi (21bar)



8080-G Alemite **\$3,105.00**

### LARGE CAPACITY GREASE HOSE REEL

- Suitable for air, water, oil and fuel
- Supplied with 15m x 24mm ID hose
- Sealed spring cassette
- Sealed and plated bearings
- Narrow width



505224N **\$2,248.00**

### SAMOA SPRING REWIND HOSE REEL

- Heavy duty full metal double pedestal construction
- Hose capacity: 15m x 19mm ID
- 1,500psi (103bar) hose pressure rating
- 3/4" BSP(f) inlet/outlet
- Full port nickel protected steel shaft



8082-G Alemite **\$3,947.00**

### 1-1/2" SPRING REWIND HOSE REEL

- Low profile hose connector ensures smooth even hose wraps
- 1-1/2" hose ID mm
- Inlet: 1-1/2" NPTF
- Maximum operating pressure: 300psi
- Suitable for use with air, water, oil and fuel



TP015S1T1-211R5 Flomec **\$5,250.00**

### 1/2" THREADED ELECTRONIC METER

- Flow rates from 1.8 to 18L/min
- Max operating pressure: 3,625psi (250bar)
- Max. operating temperature 120°C
- Other sizes available from 1/2" to 4"
- Available in SS body



D-1000AV Flomec **\$10,135.00**

### 3" FLANGED MECHANICAL METER

- Flow rates from 50 to 1,000L/min
- Max operating pressure: 175psi (12bar)
- Max. operating temperature 80°C
- Available in AL, SS & body
- Other sizes available from 1/2" to 4"



G2A20109LMA GPI **\$2,604.00**

### 2" ELECTRONIC THREADED TURBINE METER

- Flow rates from 76 to 760L/min
- Max operating pressure: 1,500psi (102bar)
- Max. operating temperature 121°C
- Available in AL, SS, Brass & PVDF body
- Other sizes available include 1/2" to 2"



TM200-B GPI **\$2,036.00**

### 2" FLANGED PVC METER

- Flow rates from 76 to 760L/min
- Max operating pressure: 225psi (15bar)
- Max. operating temperature 60°C
- Available in PVC body
- Other sizes available from 1/2" to 4"



# REFUELLING & STORAGE



001021-PU iCan

\$193.40

## 10L CONTAINER PUMP KIT

- Sturdy hand pump for fast dispensing
- Prevents cross contamination
- Square base design for increased stability
- Colour code labelling system for easy lubricant identification



001021-ST iCan 10L

\$88.70

## CONTAINER STORAGE LID KIT

- Stores fluids safely
- Prevents cross contamination
- Colour code labelling system for easy identification
- Suitable for use with a variety of lubricants and fluids



L20040PA

\$1,158.00

## LOCKABLE DIESEL REFUELLING STORAGE & DISPENSING KIT

- Unique user-friendly design with lockable lid to aid fuel and dispensing kit security
- Dispensing kit consists of a 12V pump, antistatic fuel delivery hose, 2 metre battery cables
- Suitable for storing and dispensing diesel fuel only
- 200L capacity

L20040PAM as above but with meter **\$1,343.00**



001014-25 iCan

\$107.30

## 5L CONTAINER C/W 25MM POUR LID KIT

- Fully sealed system reduces the chance of lubricant contamination
- Dual scale (metric/quarts) gauge for accurate guide during dispensing
- Supplied standard with lubricant identification cards
- Quick fill port for safe contaminant free refills



5060AN

\$361.00

## HI-FLO REFUELLING DRUM PUMP

- Low torque, high volume easy to use pump delivers up to 110 L/min
- Delivery rates of 1.1 litres per rotation
- Lockable handle minimises the possibility of unauthorised fuel transfer
- Suitable for the transfer of diesel fuel, petrol, light oils up to SAE30 and kerosene



51039

\$286.40

## AUTOMATIC DIESEL NOZZLE

- Automatically cuts off when a fuel tank is full
- Can operate with flow rates up to 120 L/min
- 1" BSPT swivel included
- Suitable for applications involving an electric diesel transfer pump



Stores advertised on page one of this catalogue are independent businesses. Every effort has been made to ensure that advertised stock is available, but due to factors beyond the control of Alemlube Pty Ltd not all products advertised in this catalogue are available at all stores. Pricing for the products are special prices available through to 31st of December 2017. Regular prices vary from store to store. The catalogue pricing is calculated in good faith as the average regular price at the time of preparation. Alemlube Pty Ltd will do everything possible, within reason, to maintain stocks of advertised products but cannot be responsible for unforeseen shortfalls beyond their control. All products are covered by a 2 year warranty (unless otherwise stated) and with the aid of our sixty five strong nationwide Authorised Agent Network, technical support for all Alemlube products featured in this catalogue will never be far away. E.&O.E. Copyright 2017. Reproduction in whole or part is prohibited without written approval. All prices shown include GST. Freight charges may be applicable and may vary from region to region.