

Toyota Landcruiser 200 Series (from 2008 On) Turbo Diesel

OS-PROV-21P



**MANN Provent 200 IV Oil Catch Can Kit Install Guide**

**CAUTION: \*\* Ensure the engine is OFF & COOL before installation ! \*\***

- STEP 1:** Identify Install Area (passengers side of engine bay).  
Remove plastic engine cover
- STEP 2:** Identify fixing location. Remove OEM bracket.  
Fit Provent Bracket on studs. Return OEM bracket.
- STEP 3:** Before attaching Provent to bracket:  
Swivel Provent Inlet in to Position • Attach Drain Hose to base
- STEP 4:** Fit Provent to Bracket • Bolt the Bracket in to place
- STEP 5:** Feed the Drain Hose down through the engine bay and secure.  
Secure - with bolt, hose clamp and cable ties.



**STEP 1:**



**STEP 2:**



**STEP 3:**



**STEP 4:**

45-47 Forge St, Blacktown NSW 2148 | MON to FRI: 7:30am-5:00pm | SAT: 7:30am-12:00pm

Toyota Landcruiser 200 Series (from 2008 On) Turbo Diesel

OS-PROV-21P

**STEP 6:** Remove Breather Hose from between the Crankcase Outlet and the Air Intake.

**STEP 7:** Fit Hose from Provent Lower Outlet to Air Intake. Secure with clamps.

**STEP 8:** Fit Hose from Provent Top Inlet to Crankcase Outlet. Secure with clamps. Cable-tie hoses to minimise rubbing. Double check all clamps are tight.


**STEP 9:** Replace engine cover. Ensure all tools have been removed from the engine bay.

**TIP:** Replace Mann Provent element every 40,000km to 50,000km.

View Install Slide Presentation:  
SCAN QR-CODE (page.1) >



STEP 5:

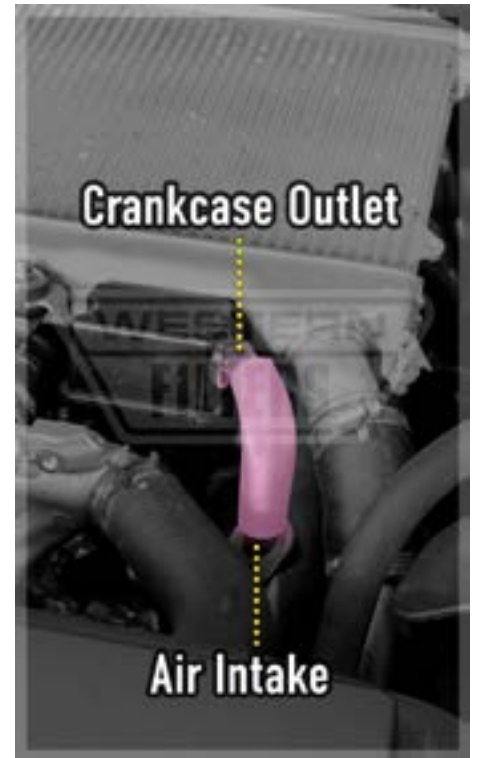

STEP 6:



STEP 7:



STEP 8:



STEP 9: