

Provent Kit for Mitsubishi Triton 2006-2009 ML 3.2L DI-D 4M4IT Eng. Common Rail

KIT No: 05-PROV-22



Mann Provent 200 Catch Can Kit Install Guide

***** Ensure ENGINE is OFF and is COOL to touch ! *****

STEP 1: Identify Install Area.

STEP 2: Swivel Provent Inlet to the correct position.

- Attach the Drain Hose to the base of the Provent
 - Secure with clamp
 - Attach the ball valve Tap, secure with supplied clamp
- *** Ensure Tap is CLOSED *****

STEP 3: Fit the Provent 200 to the supplied Bracket

STEP 4: Identify and release the OEM fittings

- Attach the Provent Bracket, return fittings and tighten.



STEP 1:



STEP 2:



STEP 3:



STEP 4:

Provent Kit for Mitsubishi Triton 2006-2009 ML 3.2L DI-D 4M4IT Eng. Common Rail

KIT No: 05-PROV-22



STEP 7: Mount the Bracket to the vehicle, running the clear Drain Hose down between the inner guard and chassis rail,

STEP 8: Remove Breather Hose which runs from the top of the Crank Case to the Air Inlet.

STEP 9: Attach the Short Straight Hose to Provent's Lower Outlet, join the other end to the Air Inlet. Secure all hoses with clamps.


STEP 10: Attach the Long Molded Bent Hose to the Provent Top Inlet, Attach the 16mm end to the Crank Case Outlet - secure with supplied clamps.

STEP 11: Re-fit the Plastic Engine Cover.


View Install Slide Presentation: [SCAN QR-CODE \(page.1\) >](#)



STEP 7:

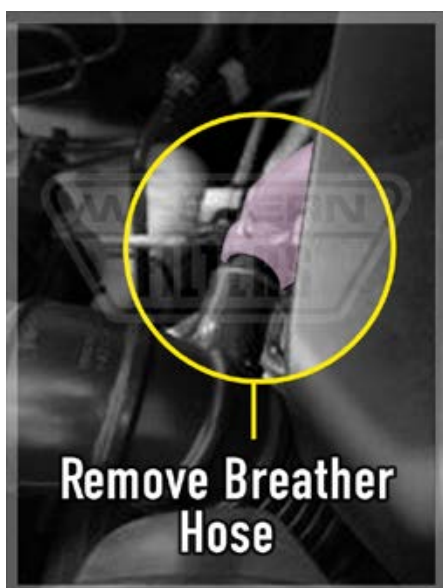

STEP 8:

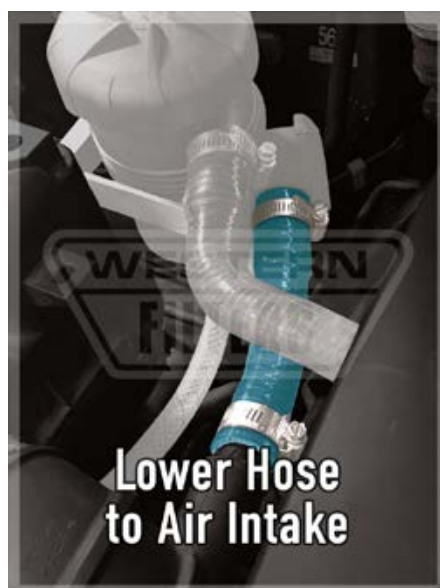

STEP 9:



STEP 10: